

FIREMAGIC®

Automatic Grill Shut-off

1-Hour Timer

Model# 3092B

Rated up to 100,000 BTUs /
Max temperature 125°F

INSTALLER: Leave these instructions with consumer.
CONSUMER: Retain for future reference.



Note: This timer can be installed horizontally or vertically. See Fig. 1-1 for horizontal setup and Fig. 1-2 for vertical setup.

Fit the Automatic Grill Shut-Off Timer in the gas supply line before the grill. The timer accommodates 1/2" NPT piping (both ends).

Important: Ensure you connect the gas supply to the side marked "IN" on the timer (see photo). It **MUST NOT** be fitted within 18" of the grill, or it will overheat, causing damage to the timer and may result in a leak.

To use, set the dial (turn clockwise) to the desired time to shut off. The dial is marked in 3 twenty minute increments (any position in between is an estimate of that set time). The timer dial will auto rotate (counter-clockwise) and will shut off the gas supply when the dial reaches OFF (i.e. the time is completed).

Important: When using the timer for periods of less than twenty minutes, you must first set the dial to 20 minutes (to activate), then return (counter-clockwise) to the desired amount of time. This will ensure proper timer operation. See Fig. 1-1 or Fig. 1-2.

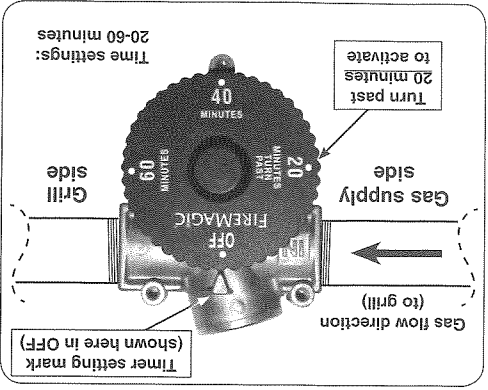


Fig. 1-1 Horizontal setup

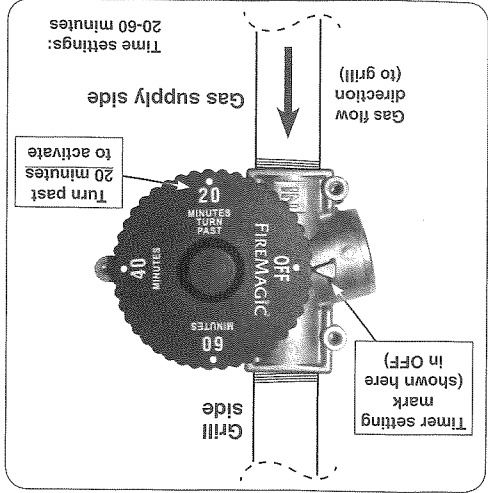


Fig. 1-2 Vertical setup